

## Exterior Convex Mirrors

The weather resistant heavy duty acrylic convex mirror is versatile and robust and will handle many industrial and traffic situations. Complete with a fully adjustable wall mounting bracket (optional pole mounting accessories are available) which is easy to install and allows the mirror to be angled in the most effective position.



Pedestrian Safety



Exterior Deluxe HD

### Interior/Exterior (Sheltered Conditions)

Model	Description (mm)	Viewing Distance (M)	Acrylic Face Thickness (mm)	Back
M18036JP	400 diameter	7	2	ACM
M18056JP	600 diameter	10	2	ACM

Supplied with bright zinc "J" arm bracket. ACM = Aluminium Composite Material.

### Exterior Heavy Duty

Model	Description (mm)	Viewing Distance (M)	Acrylic Face Thickness (mm)	Back
M18044S	450 diameter	28	2	Vinyl Celuka <sup>1</sup>
M18062S	600 diameter	38	2	Vinyl Celuka <sup>1</sup>
M18144S	900 diameter	55	3	Vinyl Celuka <sup>1</sup>

Supplied with bright zinc "J" arm bracket. <sup>1</sup>10mm.


### Exterior Deluxe Heavy Duty

Model	Description (mm)	Viewing Distance (M)	Acrylic Face Thickness (mm)	Back
M18066D	600 diameter	38	3	Vinyl Celuka <sup>1</sup>
M18087D	800 diameter	50	3	Vinyl Celuka <sup>1</sup>
M18445D	1,000 diameter	Over 60	3	Vinyl Celuka <sup>1</sup>

Supplied with pole mounting kit to suit 75mm post. <sup>1</sup>10mm.

## Food Processing and Production Line Mirrors

The impact resistant acrylic face of the food production line mirror makes it ideal for monitoring processes, reducing production costs, bottlenecks and workplace accidents. Stainless Steel is the best option for extreme cleaning regimes.

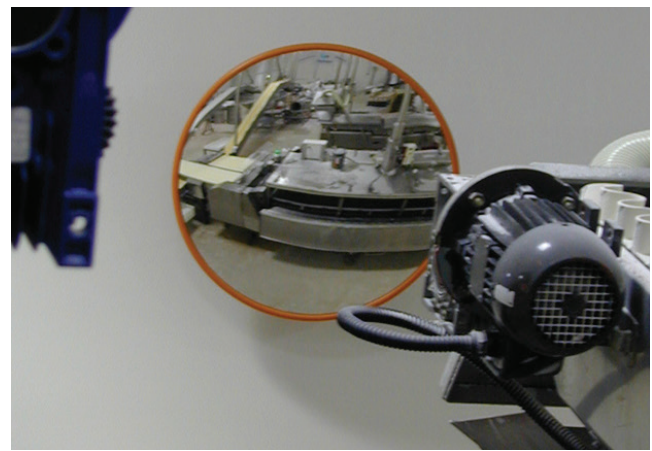

Food Processing

### Food Processing Acrylic

Model	Description (mm)	Viewing Distance (M)	Acrylic Face Thickness (mm)	Back
M18244V	450 diameter	28	2	Moulded ASA Vinyl
M18266V	600 diameter	38	2	Moulded ASA Vinyl
M18287V	800 diameter	50	3	Moulded ASA Vinyl

Supplied with stainless steel "J" arm bracket.

### Food Processing Stainless Steel

Model	Description (mm)	Viewing Distance (M)	Stainless Steel Face Thickness (mm)	Back
M16144FE	450 diameter	32	0.7	Stainless Steel
M16166FE	600 diameter	42	0.9	Stainless Steel
M16187FE	800 diameter	60	0.9	Stainless Steel
M16505W	500 wall dome	30	0.9	-
M500CD	500 ceiling dome	5	1.2	-

Supplied with stainless steel "J" arm bracket (excludes dome mirrors)