

## INSTRUCTIONS FOR FACTORY SET COMBINATION LOCK

### THIS IS YOUR PERSONAL SAFE COMBINATION:

1. Turn knob once left up to: .....
2. Turn knob right up to: .....
3. Turn knob left up to: .....
4. Turn right up to catch. Lock is open.

For closing turn at least once left. Change of combination according to instructions.

### INSTRUCTIONS FOR CHANGING THE COMBINATION:

1. Open the door of your cabinet, remove the two screws on the back of the combination lock. Pull apart the two parts of the lock:
  - (a) the front with the square shaft, bearing No. 1
  - (b) the back showing the housing with two screws on the right and:
    - i. the hole for the square shaft, and above it
    - ii. the small round window revealing the numbers 1, 2, 3 or 4 which can be dialled by inserting the square shaft from behind through the shaft-hole and turning it until the required number shows.

Four different combinations are possible. One combination is set by the factory. For this combination the No. 1 on the square shaft is set opposite the No. 1 in the window.

The No. 1 on the shaft set opposite the No. 2 in the window increases the combination by 25.

The No. 1 on the shaft set opposite the No. 3 in the window increases the combination by 50.


The No. 1 on the shaft set opposite the No. 4 in the window increases the combination by 75.

2. By inserting the square shaft from behind, dial either No. 2, 3 or 4 to appear in the window. Pull out the shaft and re-insert it correctly, setting the No. 1 on the shaft opposite the number you have dialled.

**Example:**

	Shaft	Window
Comb set by factory	53 62 19 1	1
New combination	78 87 44 1	2
New combination	3 12 69 1	3
New combination	28 37 94 1	4

3. Reassemble lock and **TRY OUT WITH THE DOOR OPEN!** Only after the lock is found to be operating correctly **MUST THE DOOR BE LOCKED!**

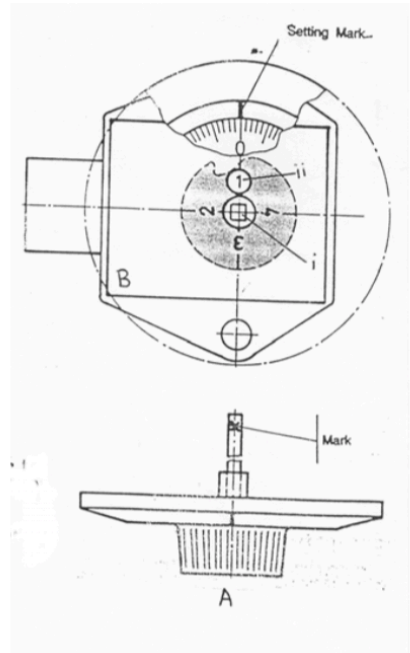

**WE ARE NOT RESPONSIBLE FOR MALFUNCTION DUE TO INCORRECT RE-ADJUSTMENT OF THE COMBINATION.**