

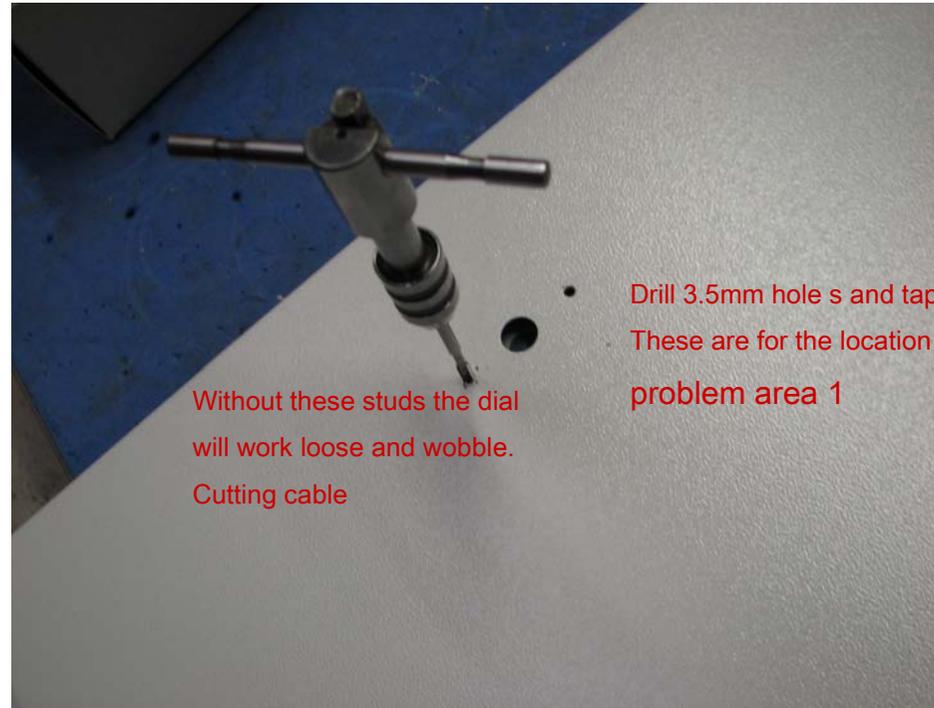


# Possible Secu A and B installation issues

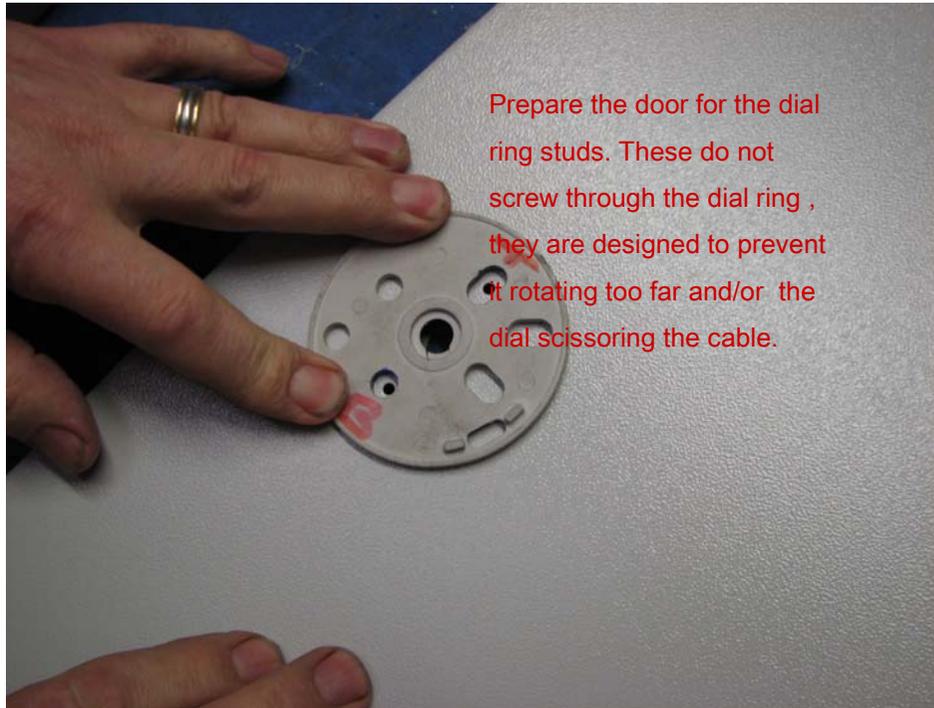

# Possible Secu A and B installation issues

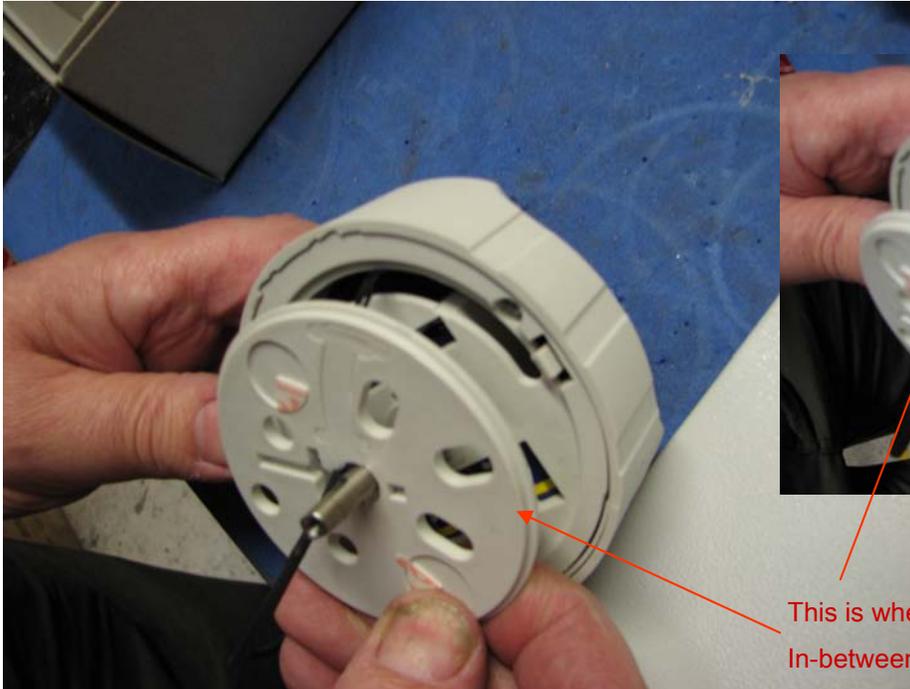

This is where it gets trapped if your not careful, In-between case and dial ring. Then the turning motion acts like a scissor action over time.





Rotate to ensure free movement and nothing is trapped

All locks have some areas of possible problem.

The 2 areas with the Secu locks are ;

1. If the location screws are not used for the dial ring the sticky pads ( now reduced in size and only for location purposes ) work loose and cause the dial to wobble and shear the cable at this point.
2. The cable becomes trapped in between the dial ring and key pad , the screw is tightened in the spindle and this crushes the cable causing long term cable shear or intermittent faults. Only evident during prolonged use

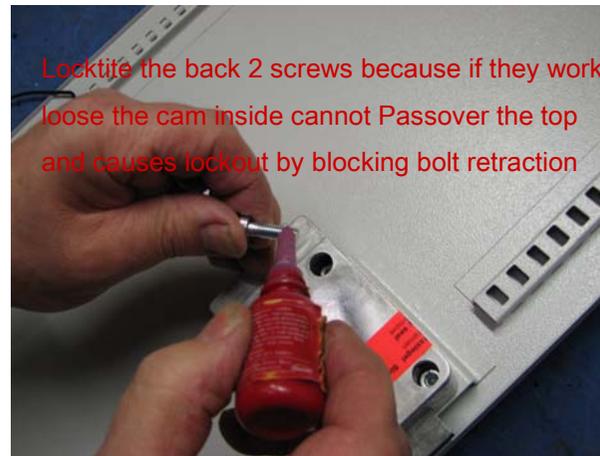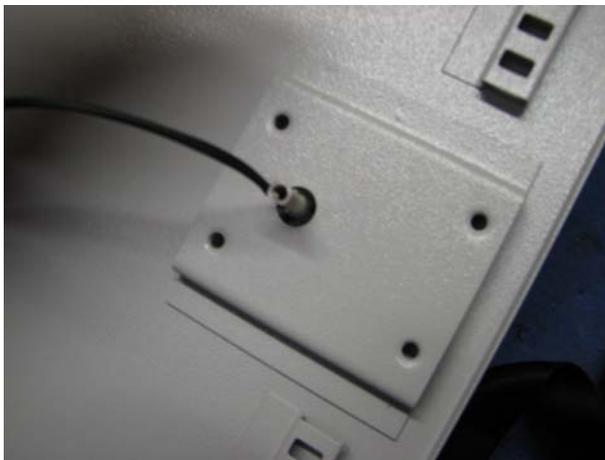

Locktite the back 2 screws because if they work loose the cam inside cannot Passover the top and causes lockout by blocking bolt retraction